

Float Level Adjustments

26 & 28mm SC3 Model SmartCarbs


Proper float level and control are critical for the optimal function and performance of the SmartCarb® SC3. SmartCarb Fuel Systems pre-sets the float level in every SmartCarb® prior to shipping, however adjustments may be made to alter or improve running characteristics.

NOTE: Float level adjustments should be made only after achieving best performance using the external adjusters and confirming proper fuel tank venting and fuel flow into the SC3 (no restrictions).

Adjusting the float level in the SC3 requires access to the float system (carburetor uninstalled and float bowl removed). Refer to the User Manual (included with your purchase or available online at smartcarb.com/technical-support) for reinstallation instructions after making float level adjustments.

Making Adjustments

1. Assess the float setting by inverting the SmartCarb® so that it is upside down and level. Lift the floats and let them fall back into their lowest position, resting on the float needle valve plunger. Viewing from the choke side of the SC3, watch where the POM float parting line points along the brass choke pick-up tube (standard float setting shown below).

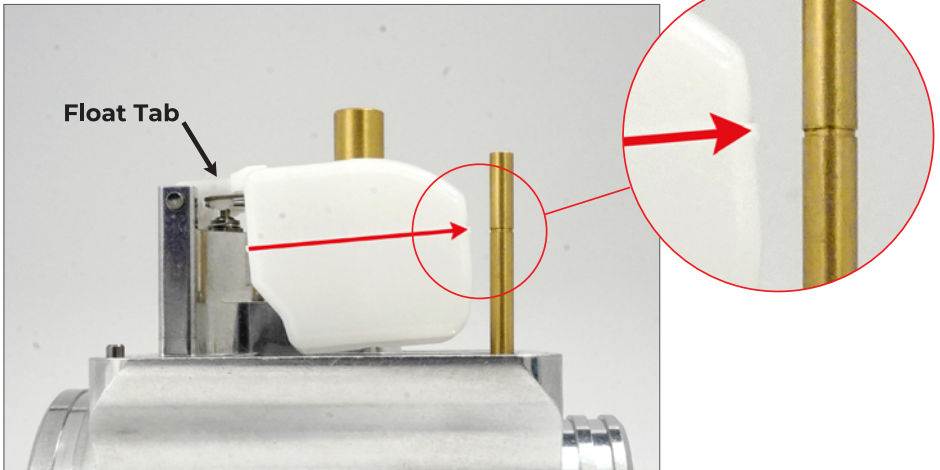

2. Raise or lower the float level setting by making small adjustments to the float tab. To raise the float level, carefully bend the tab up. To lower the float level, carefully bend the tab down.

NOTE: A little bit goes a long way. Make small adjustments when bending the float tab (.5mm increments or less at a time).

Adjustments & Effects

In general, raising the float level will richen up the air/fuel (A/F) mix ratios while lowering the float level will lean them out.

Running characteristics that may benefit from raising the float level include:

- The engine cutting out after a sustained wide open (WOT) pull
- Lowering an otherwise high idle RPM that can't be corrected using the external adjustments or identified as being caused by an air leak or insufficient throttle cable slack

Running characteristics that may benefit from lowering the float level include:

- Engine stalling at low throttle positions/RPMs, particularly when going downhill, that can't be fixed by going leaner (counterclockwise) on the clicker adjuster (top of the carb)
- Hard starting after a momentary tip-over
- Poor fuel economy despite otherwise excellent performance

Contact

support@smartcarb.com

+1 (816) 255 2328




@SmartCarb

#smartcarbequipped

SmartCarb Fuel Systems, Inc
9900 E 56th St
Raytown, MO 64133
USA

Online Resources

Manuals, Videos, Guides, & More

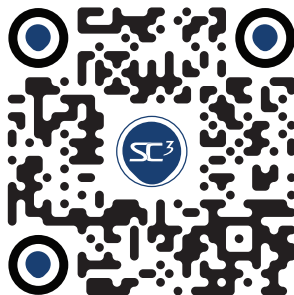

smartcarb.com/support/